


Overview

HP POS Pole Display

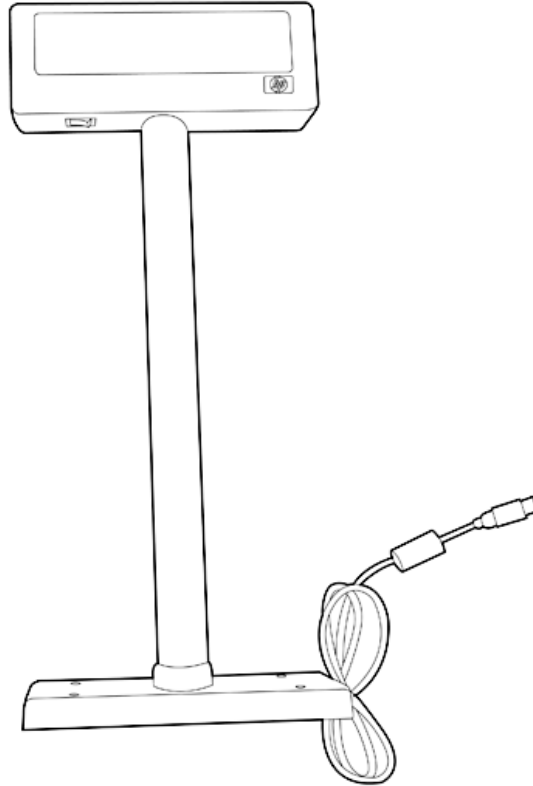

Models

HP POS Pole Display

FK225AA

Introduction

HP POS Pole Display is a multi-size adjustable pole display that provides your customers clear, easy-to-read information at the fastest data-transfer rate available. It can be tilted and swiveled for maximum visibility and can attach directly to HP rp3000, rp5000, and rp5700 POS Systems.

Key Benefits

- Vacuum Fluorescent Display with 20 columns and 2 lines
- Supports three different heights by adding extension supports included in the kit
- Supports multiple command modes, with EPSON command mode set as default
- Supports standard USB 2.0 port
- Control boards designed into top display panel to prevent potential damage from wet counter surface
- Self-test diagnostic function checks the circuit board
- Optional circular mini-base for stability in a small space

Overview

Compatibility

The HP POS Pole Display is compatible with HP rp3000, rp5000 and rp5700 Point of Sale Systems.

NOTE: Not all models are available in all regions.

Service and Support

Your HP branded Peripheral Limited Warranty is a three (3) year (HP Option Limited Warranty Period) parts replacement warranty.

Technical Specifications

General	Display Type	Vacuum Fluorescent Display, Blue Green
	Brightness	350 – 700 cd/m ²
	Characters Support	95
	Character font	5 x 7 dot matrix, cursor
	Character type	95 Alphanumeric, 32 International Characters
	Buffer size	20K Byte
	Character size	5.5(W) x 10.5(H) mm
	Dot size (X * Y)	0.86 x 1.22 mm
	Command Modes	ICD-2002, EPSON POS D101, Aedex, UTC/S, UTC/P, ADM788, DSP800, CD5220
	Viewing Angle	90 degrees Max
	Horizontal Rotation	355 degrees Max
Mechanical	Panel Dimensions	225 x 50 x 86mm
	Support (pole) Dimension	3 pole sections included: 130mm each Can also be used with no pole sections, mounting the panel directly onto the base
	Rectangular Base Dimension	217mm (W) x 106mm (D) x 20 mm (H)
	Optional Circular Base Dimension	Φ70.96 x 65.48mm (W) x 35 mm (H)
	Cable Length	1.6 m (USB)
	Weight	520 g (VFD and cable) 45g (1 pole) 460g (rectangular base) 25g (circular base)
Interface/Connection	Interface	USB
	Connection	Type A
Power	Voltage (typical)	5V
	Current consumption (typical)	0.5 A
Operating Systems	Genuine Windows Vista® Business 32* Genuine Windows XP Professional Genuine Windows Embedded for Point of Service (WEPOS)	
	<p>* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements</p>	
Drivers	Windows XP, Windows Vista, OPOS, JPOS	
Reliability	MTBF=30,000 hours	

Technical Specifications

Agency CE, FCC Class B, Canadian ICES-003, MIC, RoHS, WEEE

Certifications

Option kit contents HP POS Pole Display, Point of Sale System Software and Documentation CD and the Options Warranty Manual

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Windows Vista is a US registered trademark of Microsoft Corporation.